



SUPRA MAINS BLOCK MD-16-AUS/NZ

Screened Mains block with 16A inlet & NIF-filter

Rev.date: 2023-08-17

Customs tariff no: 8536901000

Country of origin: Sweden

SUPRA Mains Block MD-16-AUS/NZ (Australia & New Zealand)

Supra LoRad MD mains blocks are designed to shield and filter noise. Supra NIF (Non-Intrusive Filtering), an efficient high frequency (RFI) transient filter. It is designed and configured to efficiently suppress RFI interference, but not to dampen quick recharge demands from the connected devices power supplies. Supra NIF is developed by Ben Duncan Research in England.sources. It is possible to order with custom configuration and have a capacity to suppress noise floor up to 40 dB! The Aluminum chassis is a very potent magnetic field insulation, why our mains block as well as adjacent devices is efficiently shielded from both electric, electro-magnetic and magnetic fields, a much wanted property where there is high currents rushing.

All parts are made in Sweden or Germany & assembled in our factory in Ljungskile, Sweden.


- Noise damping up to 40 dB!
- Internal wiring of 2.5 mm² oxygen-free copper leads
- Support a staggering peak power 3250 Watt @ 230 Volt and 16 Ampere
- Protect both you and your gear from various alternating fields
- Wall mounted or standing on a flat hard surface. Rubber feet and brackets included
- Custom tailored NIF-filter from Ben Duncan Research in UK
- Shielded aluminum chassis prevents electric, electro-magnetic and magnetic fields

Cable not included!



CONSTRUCTION

Chassis:	Aluminum
Standard:	AUS/NZ Standard
Inlet socket:	SUPRA MCH-16, 16A, fuse 13A
Outlet sockets:	7 to 11 x SUPRA MCH-13 AUS/NZ
Rated Current/Voltage:	13A / 250V / 3250W
Max RFI Noise damping:	40dB
Width & height (WxH):	90x50mm
Length (L):	MD07-16 = 837mm + 52mm for each additional socket
Standard filtering:	No NIF-filter for outlet no 1-2 Increased filtering, the last socket got highest damping

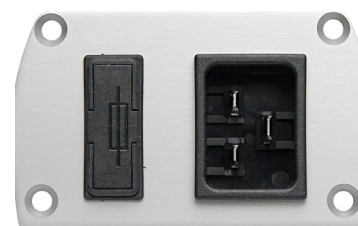

Note! 16A Inlet
13A Fuse

All mains blocks can be ordered with or without filters for any of the sockets.
Power Amps are recommended to be connected to an unfiltered outlet.

Connect the Mains block with a LoRad cord set (16A) further reduce noise by 6-12 dB!



PRODUCT	Qty	Part no	EAN-13	Carton	Weight
MAINS BLOCK MD07-16-AUS/NZ	1PC	Special, made upon order		10	1,51
MAINS BLOCK MD09-16-AUS/NZ	1PC	Special, made upon order		10	1,85