

## LORAD 2.5 CS-EU/ANGLED MAINS CORD SET

Screened Mains Cord Set, 250V/10A



Gauge: 3x2.5mm<sup>2</sup> / AWG 13

Rev.date: 2022-08-30

Customs tariff no: 8544499500

Country of origin: Sweden

- Screened mains flex cable
- Gold plated Connectors, angled Schuko plug
- Tin plated OFC wires - Corrosion resistant
- Protects both from electric & magnetic fields.

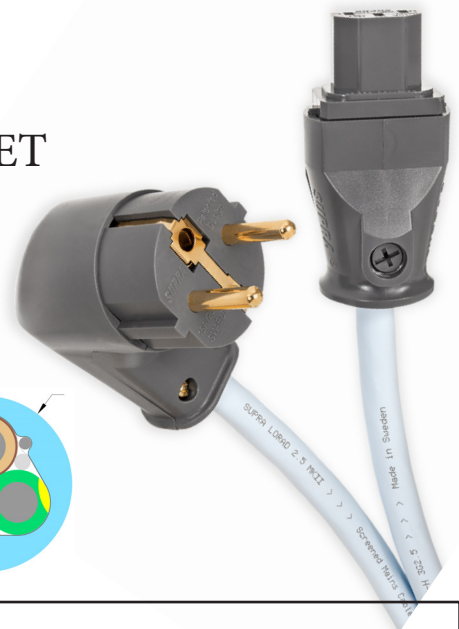


### LoRad - Low Radiation

Shielded cord set comprising Supra LoRad 3 x 2.5 mm<sup>2</sup> cable, Supra SWF10 female connector (IEC-320) and Supra SW-EU/A male plug. Current rating 10 A continuously. EU-version, with angled Schuko plug, is the most common standard throughout Europe. Exceptions are Denmark, Italy, Switzerland, Ireland and Britain. Fits our LoRad mains power distribution blocks rated 10A. LoRad means Low Radiation and the design of these mains flex cables minimises both electric and magnetic alternating fields. Allow your hi-fi gear the most welcome benefit of all, the possibility to be silent, when supposed to. Only then, the tiniest details and notes will become clearly audible. LoRad protects both from alternating fields radiating from the cable as well as from pick-up of surrounding airborne noise fields.

- Short pitch twisting of the lead cores cancels the magnetic alternating fields and will not infect adjacent interconnects with noise feedback.
- LoRad will result in a cleaner sound, better picture and a more healthy home and working environment with low levels of harmful fields.
- The screen protects your equipment from radiated mains, RF pick-up.

### CONSTRUCTION

Cable: [LoRad 3x2.5](#)  
 Cross section area: 3x2.5mm<sup>2</sup> / AWG 13  
 Screen: Semi-conductive Nylon tape, black, 100%  
 Jacket: PVC GA78, round  
 Diameter: 11mm  
 Cable colour: Iceblue (other colours upon order)  
 Marking: SUPRA LORAD 3G1.5 + Made in Sweden + Meter mark  
 Connectors: SW-EU/Angled Schuko male & SWF-10s 10A C13 IEC320 female  
 - Pin Material: 24K Gold plated Copper  
 - Pin connection: Screw/clamp  
 - Colour: Anthracite Grey  
 Cable direction: Follow the arrows > Wall socket > Power inlet  
 Rated Voltage/current: 250V / 10A  
 Packing: 1-2m Blister 25x21.5x4.8cm, 4m Blister 31,5x25,4x6,0cm



Note! The connector must be connected to a wall socket with a ground terminal for the full LoRad effect to take place. LoRad are tested and certified by Intertek Sweden, meeting the European safety regulation HD21.5 S3.

Standard lengths as below, special length cables upon order.

PRODUCT	Qty	Part.nr	EAN-13	Crt	Weight
LORAD 2.5 CS-EU/ANGLED 1M	1PCS	3002100034	7330060205439	25	0,37
LORAD 2.5 CS-EU/ANGLED 1.5M	1PCS	3002100018	7330060205415	25	0,48
LORAD 2.5 CS-EU/ANGLED 2M	1PCS	3002100026	7330060205422	25	0,58
LORAD 2.5 CS-EU/ANGLED 4M	1PCS	3002100042	7330060205446	13	1,04

