

## SUPRA PLY 2X3.4/S COMBICON

Screened Loudspeaker cable with Banana/Spade


Gauge: 2x3.4mm<sup>2</sup> / AWG 12

Rev.date: 2022-08-30

Customs tariff no: 8544429010

Country of origin: Sweden

- Screened, Dynamic sound - a multi test winner
- Extremely low inductance
- Interchangeable connectors with M6 thread, banana/spade
- 24K gold plated Copper connectors

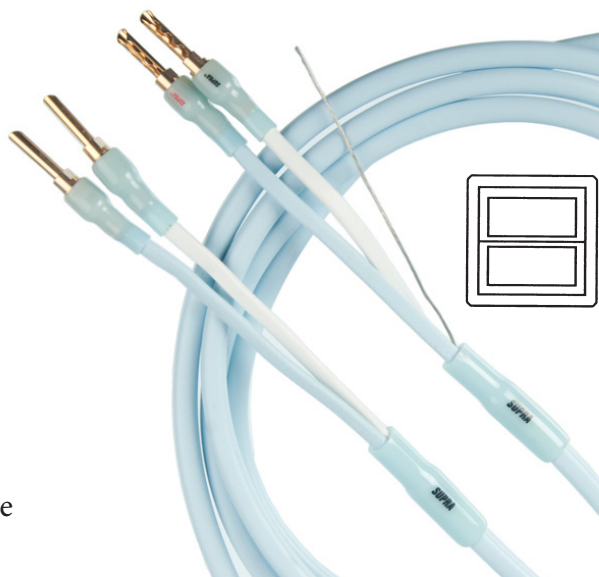

### PLY 2x3.4/S COMBICON

Ultra-low inductance for maximum transient response & minimal RFI. Combines low induction and tin plating which provides for explosive dynamics. The shielded Ply 3.4/S provide even better performance when this model's added screen earth lead is connected to speaker minus terminal or to the earth terminal at the Amplifier chassis. Supra shielded cables both radiate and pick-up less noise compared to non-shielded. The result is immediately lowered noise floor and increased dynamics of the Hi-Fi system. Especially the so called micro dynamics; tiny, tiny notes, phrasing, the small differences how hard the drum is hit, in fact all the small discrepancies making the music come alive and not sounding artificial will appear and suddenly stand out from a pitch black background, free from noise, a truly remarkable discovery for most music lovers.

CombiCon is pressed under high pressure onto the conductor. Done correctly, it brings the material together into an airtight, homogeneous and electrically invisible joint, almost similar to fusion welding.

### CONSTRUCTION

Cable:	<a href="#">SUPRA Ply 2x3.4/S</a>
Cross section Area:	2x3.4mm <sup>2</sup> / AWG 12
Conductors:	+ Blue, - white & drain wire for screen connection
Jacket:	PVC GA78, square model
Diameter:	7.3 x 7.3 mm
Colour:	Iceblue (other colours upon order)
Marking:	SUPRA PLY 2x3.4/s > Made in Sweden > Meter mark
Configuration:	Stereo pair of 2 > 2 plugs, Right = red, left = black
Connectors:	Combicon, 8 x Banana pin & 8 x spades included
Material:	24K gold plated Copper
- Connection:	Crimp, 8 x <a href="#">Combicon CB03 M6</a>
- Bending protection:	Sleeve 4 x S2-4 red, 4 x S2-4 black
Cables splitt:	20cm, Sleeve 2 x S9 red, 2 x S9 black
Signal direction:	Follow the arrows > amplifier > Speaker
Packing:	Blister 2m 25x21,5x4,8 cm Blister 3-4m 31,5x25.4x6 cm

Earth/Screen connection.

The earth conductor should be connected in the source end only (amplifier side) to:

1. Earth terminal at the amp (if available)
2. Connect to any of the amp chassis screws.
3. Negative speaker out terminal



Standard lengths as below, special lengths upon order.

PRODUCT	Qty	Part.no	EAN-13	Carton Weight
PLY 2X3.4/S COMBICON 2X2M	1PAIR	1000100261	7330060200199	25pcs 0,9
PLY 2X3.4/S COMBICON 2X3M	1PAIR	1000100139	7330060200205	13pcs 1,2
PLY 2X3.4/S COMBICON 2X4M	1PAIR	1000100253	7330060200212	13pcs 1,5