

SUPRA SWORD 2x3.0 EXCALIBUR

High end screened loudspeaker cable with Rhodium plated plugs


Gauge: 2x3.0mm² / AWG 12

Rev.date: 2022-08-30

Customs tariff no: 8544429010

Country of origin: Sweden

- Screened - Completely transparent and dynamic sound
- Bifilar wound litz conductors
- Interchangeable connectors with M6 thread, banana/spade
- Rhodium plated solid OFC connectors

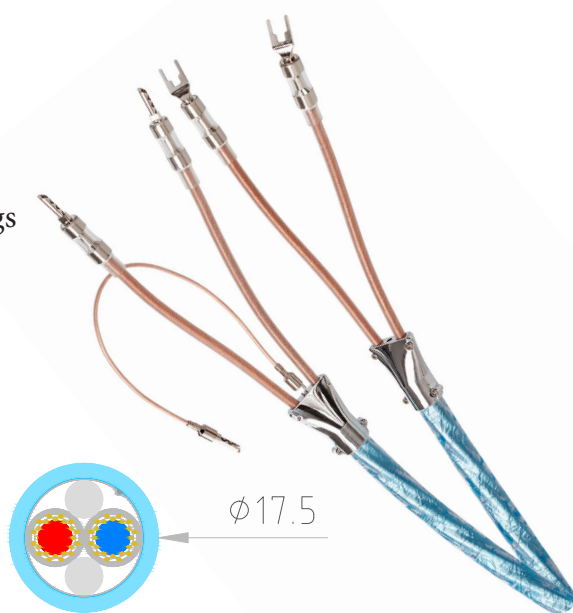

Sword 2x3.0 Excalibur

Our ultimate speaker cable, with no compromises or shortcuts. Every part of the design are of highest quality while still affordable and as always manufactured in Sweden.



Bifilar-wound litz 5N OFC conductors, twisted and shielded for minimal RFI interference, PE insulation, CNC-milled cable splitter with ground connection, XL-Annorum earth conductor, solid copper rhodium plated connectors. The Supra CombiCon CB03-EX crimp bodies are especially designed for Excalibur, and each conductor is twisted into the crimp body for maximum bending strength. The litz wires are crimped mechanically under high pressure for a perfect and airtight cable connection. The connector body has a Supra M6 thread, which allows the user choice of interchangeable rhodium plated Supra spades or banana/BFA pins. The ground connections are in standard 30cm long with specially adapted rhodium-plated Supra CombiCon connectors. The cable behaves as a non-inductive and in-phase cable through the entire audible frequency spectra. The only thing not cancelled is the sound, allowing you to hear every little note of the music, at full dynamics. Enjoy!

CONSTRUCTION

Cable:	Sword 2x3.0 Excalibur
Conductors (x2)	2x12x0.40 (Enameled)
Area:	2x3.0mm ² / AWG 12
Insulation:	Transparent PE, D=6mm
Screen:	Alu/PET foil, 100%
Jacket:	PVC GA74, round, D=17,5mm
Screen connection:	30cm, Interchangeable connectors in Rhodium
Colour:	Transparent Iceblue
Configuration:	Stereo pair, 2 > 2 connectors, Right = red, left = black
Connectors:	Combicon Rhodium, 8 x Banana M6 pins & 8 x spade M6 are included
- Material:	Rhodium platerad OFC
- Connection:	Crimp, 8 x Combicon CB03-EX RH M6
- Insulation:	Sleeve 4 x S03-EX red, 4 x S03-EX black
Signal direction:	Follow the arrows > amplifier > Speaker
Packing:	Black wooden box 35x35x9 cm

Earth/Screen connection.
The earth conductor should be connected in the source end only (amplifier side) to:

1. Earth terminal at the amp (if available)
2. Connect to any of the amp chassis screws.
3. Negative speaker out terminal

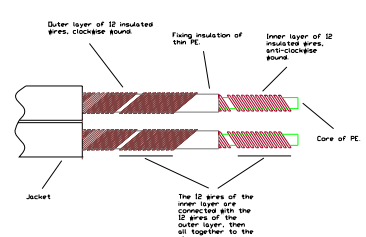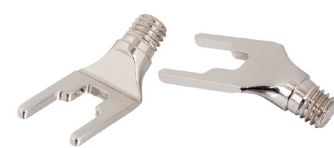

Standard lengths as below, special lengths upon order.

PRODUCT	Qty	Part.no	EAN-13	Weight
SWORD EXCALIBUR COMBICON 2X2M	1PAIR	1000100980	7330060208034	2,4
SWORD EXCALIBUR COMBICON 2X2.5M	1PAIR	1000101053	7330060208508	2,7
SWORD EXCALIBUR COMBICON 2X3M	1PAIR	1000101004	7330060208041	3,0
SWORD EXCALIBUR COMBICON 2X4M	1PAIR	1000101012	7330060208058	3,6