

SUPRA EFF-IRB AUDIO

High End Analogue Interconnect Cable with angled RCA

Gauge: 1x3x0.46mm² / AWG 21

Rev.date: 2023-03-17

Customs tariff no: 8544429010

Country of origin: Sweden

- Silverplated tube lead & low inductance
- Low skin-effect has a dynamic & clearly audible influence
- Individual conductors Aluminum screens
- A multi test winner



EFF-IRB 2RCA-2RCA Audio - High End Analogue Interconnect Cable with angled RCA


Flawless signal transfer of even the most subtle music details is always the goal. There are electric properties that needs to be addressed prior to reaching the goal; capacitance, phase, skin-effect & shielding. The purity of conductors, dielectric choice, plating quality is generally sub-standard even though they might appear high-end.

The skin-effect is the physical event forcing higher frequency signals flow closer to the conductor surface. This means that low & high frequency impedance are not equal and therefor affects the signal level & phase. It has a profound dynamic & clearly audible influence because an audio signal is in principle nothing but an infinite number of frequencies at an infinite number of levels. In order to minimize the skin-effect, the EFF-I is designed according to our Equalized Frequency Flow (EFF) technique. Around a plastic core, the strands are wound forming a conductor tube, in turn forcing all frequencies through the same cross section area well tuned for the entire audible range. The result is a maintained frequency respons as from the source without any level changes like treble roll-off or phase shift. Further the strands are silver plated to provide for ultra-high frequencies & are insulated using PE, providing the lowest capacitance. Finally there must not enter any RFI destroying all efforts to maintain original signal integrity & our aluminized PET foil is a high bandwidth efficient shield keeping noise outside.

Equipped with our Supra PPR-B fully shielded connectors. The connector features angled connection access to the chassis female, hence reducing bend torque from the cable weight. Suitable for use in every single-end application from entry to mid-end level, where dynamics, timing and faithful music reproduction is desired.

CONSTRUCTION

Cable:	SUPRA EFF-I
Jacket:	PVC GA78, round
Diameter:	7.8mm
Colour:	Iceblue (other colours upon order)
Marking:	SUPRA EFF > Made in Sweden > Meter mark
Screen connection:	Semi-balanced, the screen is only connected at the source end
Connectors:	SUPRA PPR-B
- Type:	2 RCA Male > 2 RCA male, red/white
- Material:	Pins of 24K Gold plated OFC
- Colour:	Anthracite grey
- Locking:	Expanding outer ring to terminal & Quick lock cable cap.
Solder tin:	Almit SR34 Super
Signal direction:	Follow the arrows > Source > Receiver
Packing:	Blister 25 x 21.5 x 4.8cm

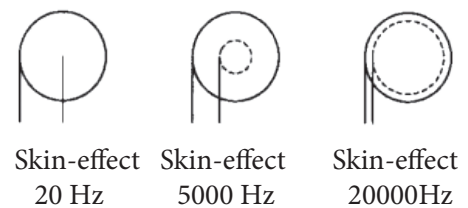

Special length are made upon order, the only additional cost is the meter price per extra meter.

PRODUCT	Qty	Part.no	EAN-13	Carton	Weight
EFF-IRB AUDIO PAIR 1M	1PAIR	1001906898	7330060202605	25	0,37
EFF-IRB AUDIO PAIR 2M	1PAIR	1001906971	7330060202841	25	0,46