

SUPRA USB 2.0 A Male - A Female



USB-cable 2.0 High Speed

Version: A Male <-> A Female

Rev.date: 2023-04-17

Customs tariff no 8544429010

Country of origin: Sweden

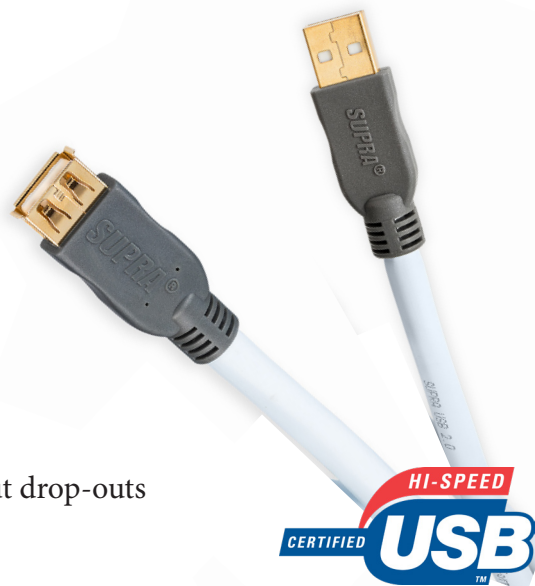

- Long cable approval - without signal degradation
- Correct data transfer - rapidly working data peripherals without drop-outs
- Perfect shielding and twinning - minimum signal degradation
- Robust USB connectors - reliable, long service life


USB 2.0 High Speed - Multi test winner!

Many USB interface users are accustomed to that the USB interface limits the distance between the devices, but not any longer. Supra USB 2.0 allows for distances up to 15 meters between your devices! The trick is as always, the shielding, separate for each pair of leads, correctly twisted leads and the exact impedance alignment of 90ohm, which is absolutely vital for USB applications for jitter-free transmissions. Supra USB 2.0 will reward you with a dynamic, rich and detailed music experience. Undoubtedly!

Available with A, B, Mini B, Micro B & A female plugs.

CONSTRUCTION

| | |
|-----------|---|
| Cable: | SUPRA USB 2.0 |
| Version: | 2.0 High Speed |
| Jacket: | PVC GA78, round |
| Diameter: | 7.1 mm |
| Colour: | Iceblue (other colours upon order) |
| Marking: | SUPRA USB > Made in Sweden > Meter mark |
| Plugs: | SUPRA USB A male <-> SUPRA USB A Female. |
| Packing: | < 6m Blister 25x21.5x4.8cm, 8-15m blister 31.5x25x6cm |

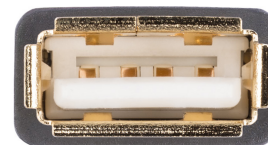

ELECTRICAL SPECIFICATION

| | |
|---------------------------|--------------------------|
| Bit rate: | 480 Mbit/s |
| Resistance: | 72 ohm/km |
| Capacitance: | 52 pF/m |
| Characteristic impedance: | 90 Ohm |
| Velocity factor: | 0,66x C (speed of light) |



Special length are made upon order, the only additional cost is the meter price per extra meter.

| PRODUCT | Qty | Part.no | EAN-13 | Crt | Weight |
|-------------------------|-----|------------|---------------|-----|--------|
| USB 2.0 A/F-A/M BLUE 1M | 1PC | 1001908217 | 7330060204968 | 25 | 0,20 |
| USB 2.0 A/F-A/M BLUE 2M | 1PC | 1001908225 | 7330060204975 | 25 | 0,25 |